


Issue	Date
1	19/02/24
Drawn By	JB



DETAIL B

- Single/dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
 - Single/dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
 - Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 5m.
- Notes:
- 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with table A1.3 (Appendix 1).
 - 2) 45° tapered have 1.5m spacing, no relaxators.
 - 3) On all highways and local roads, standard shoulders, 1m relaxation on both sides of the road, standard shoulders, 1m for lead tapers and the tapering width of lane changes.

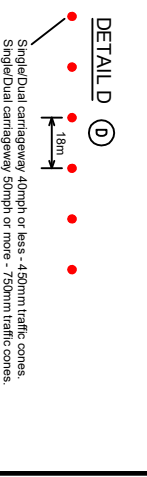

Two-way working	Standard: Normal traffic including buses and HGVs	Restricted: Cars and light vehicles only
6.25 m minimum	6.25 m minimum	5.5 m minimum
3.25-5.50 m desirable width range	3.25 m desirable minimum width	3.25 m desirable minimum width
3.0 m absolute minimum	3.0 m absolute minimum	2.5 m absolute minimum

Specials -

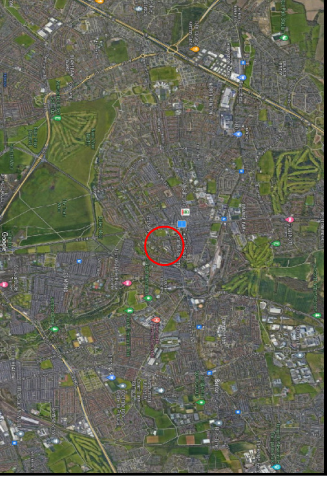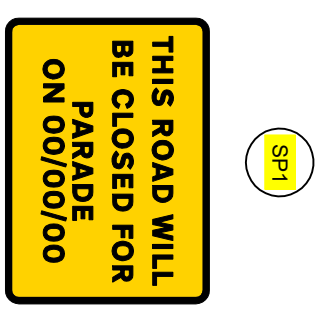

Notes -
DIVERSION ROUTE -

JOB TO TO BE MOVED ALONG WITH THE PARADE AND ROADS OPENED ONCE PARADE HAS PASSED

- KEY**
- p Traffic sign
 - Traffic cone
 - ← Traffic signals to Diagram 3000.1
 - Working Space
 - Pedestrian Barrier